Mod. 250 RV

Mod. 250 RV

U=1,1 W/m² * K tested by: ISTITUTO GIORDANO Qualità al Plurale.

Mod. 250 RV

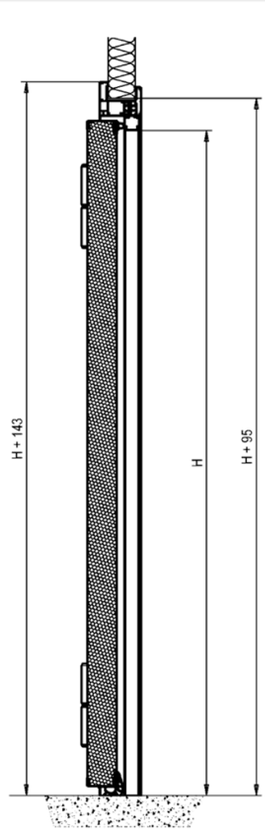

Threshold «SS»

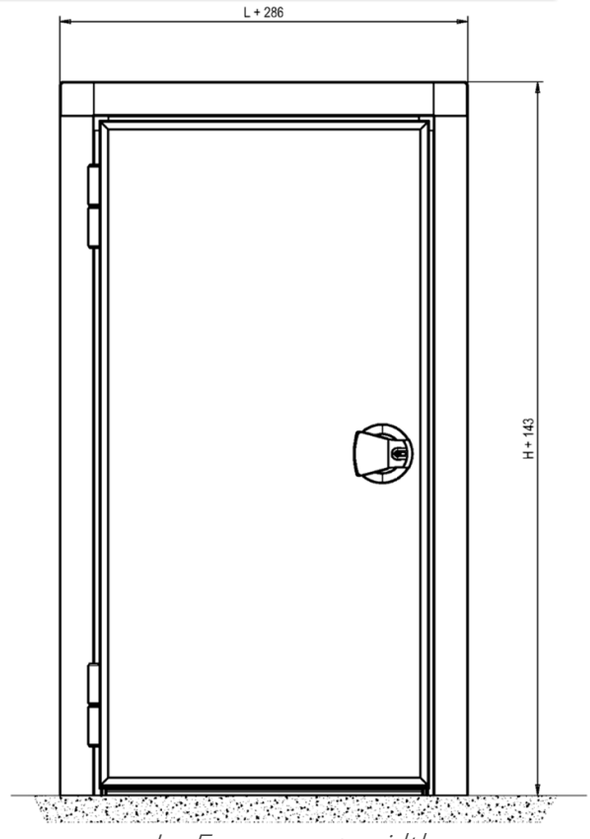

L= Free passage width
H= Free passage height



Threshold «GR»



Threshold «FP»

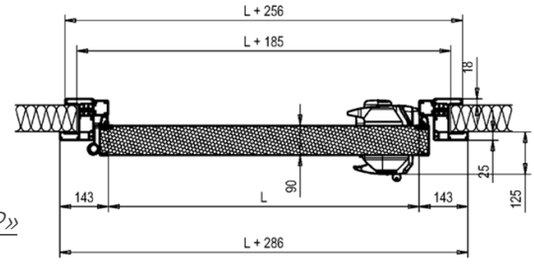

TECHNICAL FEATURES

- 90mm thick aluminum door leaf
- Internal and external coating in white plasticoated metalsheet Similar Ral 9003
- Lower and perimetral EPDM gasket
- “L” shape PVC frame (mm 100) with semi-recessed frame stop and additional modules to reach the thickness of the panel. PVC counterframe for wall installation
- Door leaf injected with polyurethane foam “PUR” CFC free
- Heating cable apply into the gasket